


# 2LSA-1000, 1024 Channel Spectral Gamma, SP, SPR

The **2LSA-1000 spectral gamma probe** is a versatile tool that can be used in a wide variety of logging applications, recording natural gamma spectra (to 3000 KeV), user-specified, energy-windowed gamma (5 windows) logs, single point resistance, and spontaneous potential. The larger crystal allows better counting statistics resulting in improved quantitative analysis in uranium applications, isotope ratios, and clay typing. Users can select from three operational modes (**256, 512, or 1024 channel**) based on their survey needs. The 2LSA-1000 provides **real time temperature compensation** not typically offered by others. Response from conventional tools drifts as temperature changes, and can be erratic when using a BGO scintillators. The 2LSA-1000 has been calibrated at the factory using several different sources and a swept temperature bath. Calibration coefficients resulting from these tests are stored inside the tool so that real time temperature compensation can be performed.



**Mount Sopris Instruments**  
4975 E. 41<sup>st</sup> Avenue  
Denver, CO USA 80216  
Ph: +303.279.3211  
Email: [sales@mountsopris.com](mailto:sales@mountsopris.com)  
[www.mountsopris.com](http://www.mountsopris.com)

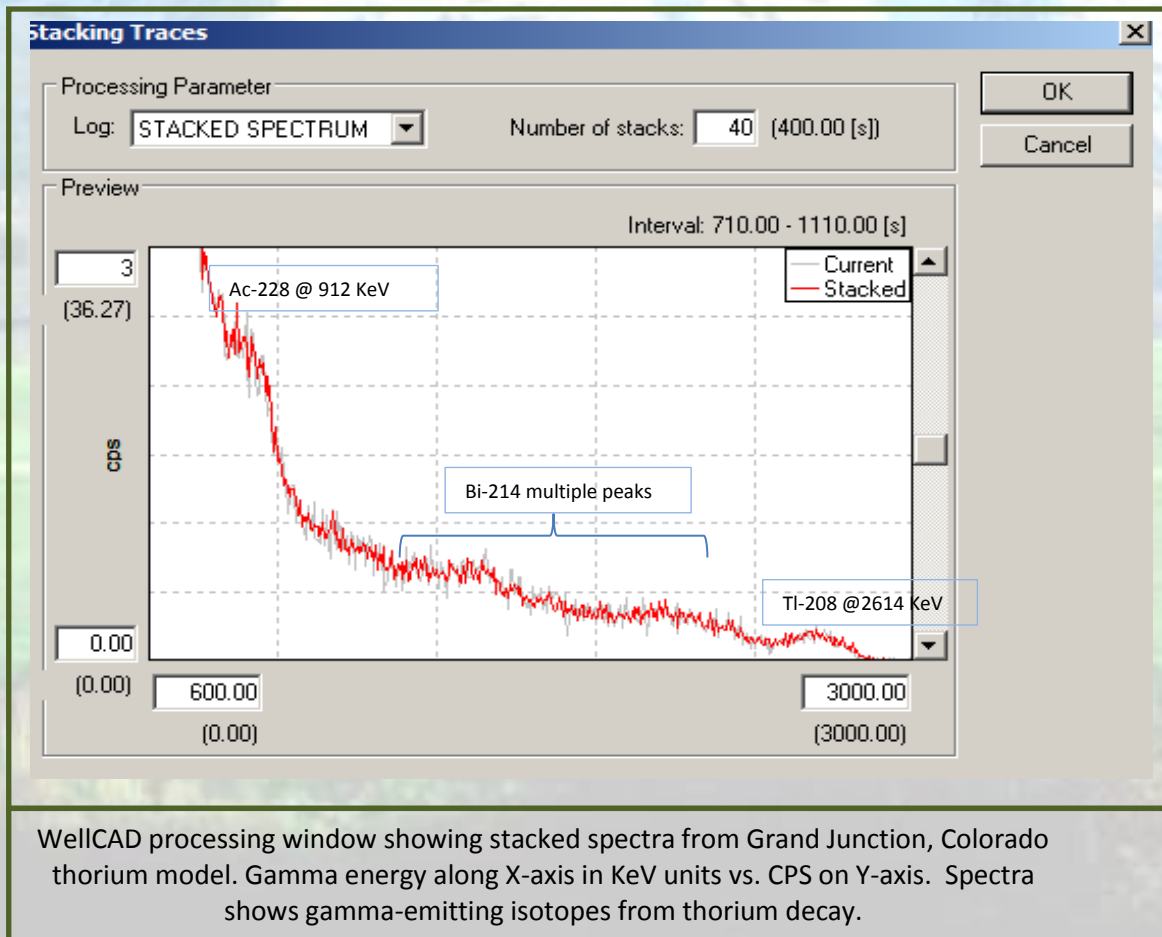

Bâtiment A - Route de Niederpallen  
L-8506 Redange-sur-Attert  
Grand Duché du Luxembourg  
Ph: +352.23.64.92.89  
Email: [info@alt.lu](mailto:info@alt.lu) \* [www.alt.lu](http://www.alt.lu)

# 2LSA-1000, 1024 Channel Spectral Gamma, SP, SPR

## Specifications

Length:	185 cm (72.8")
Diameter:	44 mm (1.75") with neoprene cover
Weight:	7 Kg (15.4 lbs)
Pressure Rating:	200 Bar (3000 PSI)
Temp. Rating:	70 °C
Gamma Sensor (s):	26.16 mm dia. x 193.04 mm long Na(Th)I Scintillation Crystal & PMT
Measurement Range:	0 – 100,000 CPS
Accuracy:	1% full scale
Resolution:	0.1 CPS
Maximum pressure	3000 PSI
Operation temperature range	0 to 60 degrees C
Storage temperature	-40 to 70 degrees C

Natural gamma energy range	0 - 3 MeV
Natural gamma energy accuracy	2% of full scale
Natural gamma energy resolution	10% full width half max.

Single point resistance range	0-1000 ohms
Single point resistance accuracy	1% of full scale
Single point resistance resolution	0.5 ohm
Sensor location (from bottom of probe)	3.93 inches (10 cm)

Spontaneous potential range	-2000-2000 mV
Spontaneous potential accuracy	1% of full scale
Spontaneous potential resolution	0.5 mV
Sensor location (from bottom of probe)	3.93 inches (10 cm)

## Features

Mount Sopris Gamma probes are versatile, ubiquitous probe functions with a wide range of applications. Calibrations from 2LSA-1000 probes can be used to generate near real-time KUT concentration logs, U3O8 eq. weight percent logs, & user-specified windowed gamma logs.

## Advantages

Mount Sopris manufactures more natural gamma and spectral tools than any other slimline manufacturer in the world today. Gamma probes with other scintillation materials, including halides of lanthanum, and sizes can be custom made for your application.

## Recommended Spares

Th232 calibration check disc, 912 and 2612 KeV peaks  
Probe O'rings  
Bull nose

### Mount Sopris Instruments

4975 E. 41<sup>st</sup> Avenue  
Denver, CO USA 80216

Ph: +303.279.3211

Email: [sales@mountsopris.com](mailto:sales@mountsopris.com)

[www.mountsopris.com](http://www.mountsopris.com)



Bâtiment A - Route de Niederpallen  
L-8506 Redange-sur-Attert  
Grand Duché du Luxembourg  
Ph: +352.23.64.92.89  
Email: [info@alt.lu](mailto:info@alt.lu) \* [www.alt.lu](http://www.alt.lu)